



DANGER


Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

DWG NO.	FEATURE
135685-01	-----
135685-11	(1B) (12D)
135685-15	(265) (12D)

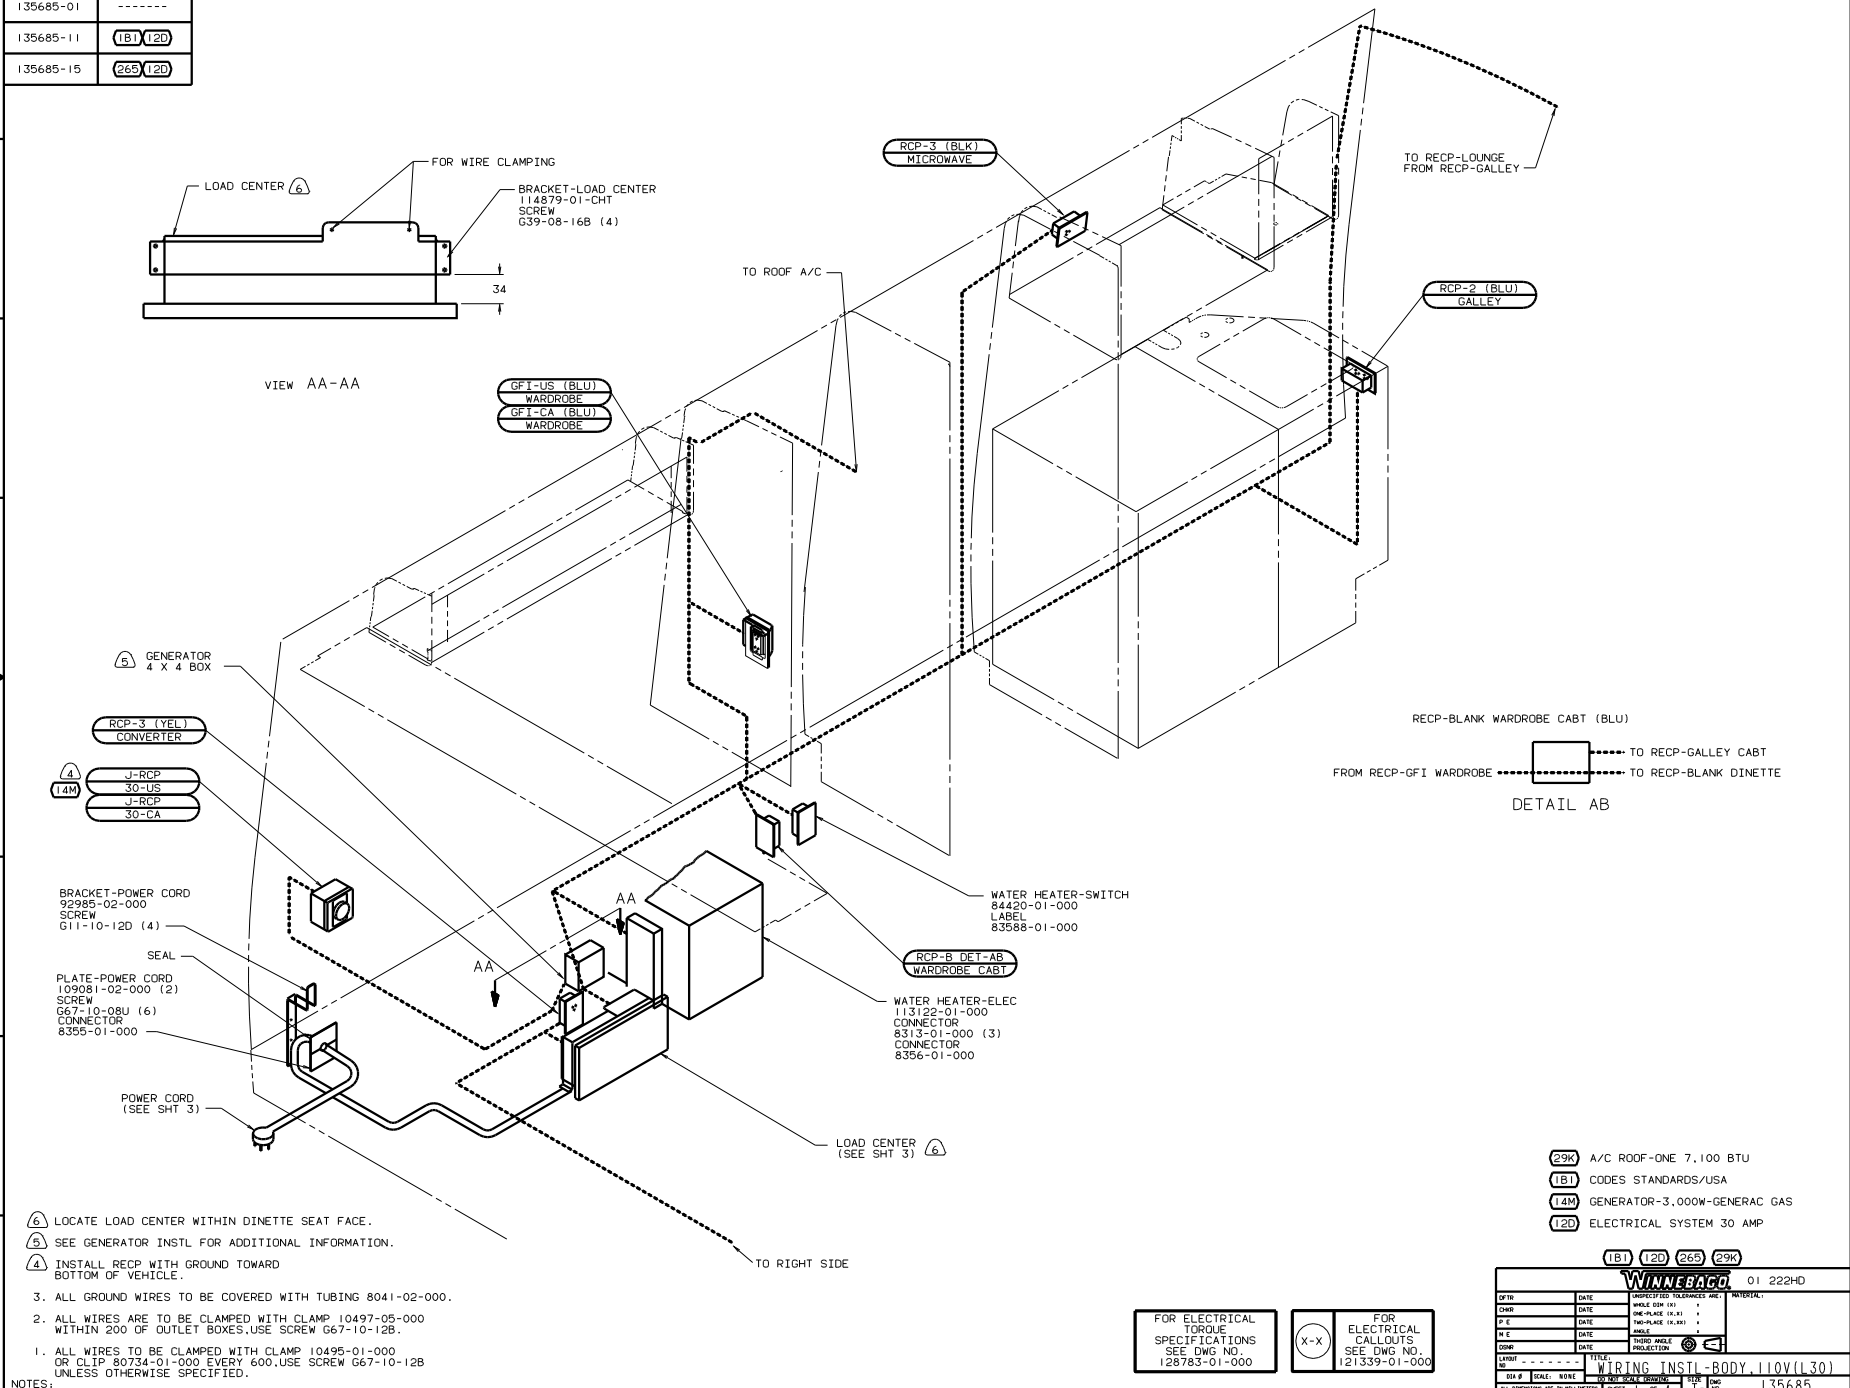

VIEW AA-AA

DETAIL AB

- (A) LOCATE LOAD CENTER WITHIN DINETTE SEAT FACE.
 - (B) SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
 - (C) INSTALL RCP WITH GROUND TOWARD BOTTOM OF VEHICLE.
3. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 2. ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
 1. ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

RECIP-BLANK WARDROBE CABT (BLU)
 FROM RECIP-GFI WARDROBE TO RECIP-BLANK DINETTE

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

(X-X) FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- (29K) A/C ROOF-ONE 7,100 BTU
- (1B1) CODES STANDARDS/USA
- (14M) GENERATOR-3,000W-GENERAC GAS
- (12D) ELECTRICAL SYSTEM 30 AMP

(1B1) (12D) (265) (29K)


WINNEBAGO 01 222HD

OF IN	DATE	UNSPECIFIED TOLERANCES ARE:	MATERIAL
OMP	DATE	WHOLE DIM (1)	
PIE	DATE	ONE-PLACE (1X.X1)	
D/E	DATE	TWO-PLACE (1X.XX)	
CON	DATE	THREE-PLACE (1X.XXX)	
	DATE	INDIC. W/ANGLE INDICATOR	

LANE # ----- TITLE: WIRING INSTL-BODY, 110V(130)

REV # SCALE: NONE TO THE SCALE SHOWN SHEET 1 OF 4 DWG NO. 135685

ALL DIMENSIONS ARE IN MILLIMETERS

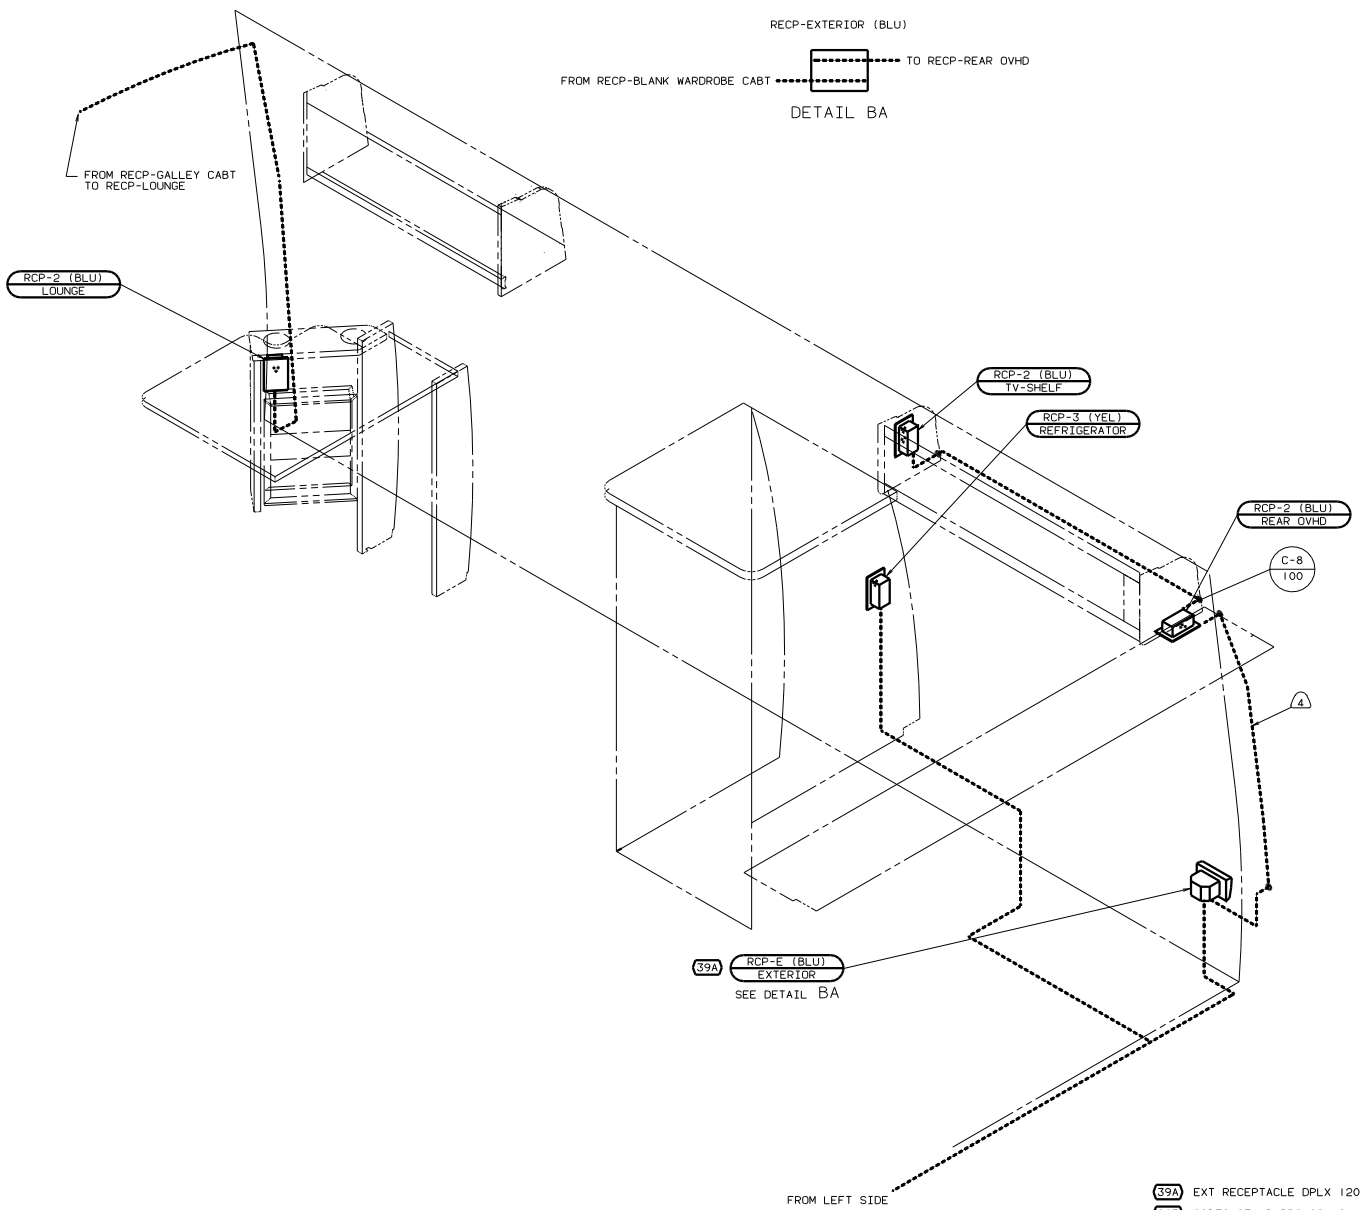

- △ ROUTE WIRE THRU SIDEWALL.
- ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.
 - ALL WIRES ARE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200 OF OUTLET BOXES. USE SCREW G67-10-12B.
 - ALL WIRES TO BE CLAMPED WITH CLAMP 10495-01-000 OR CLIP 80734-01-000 EVERY 600. USE SCREW G67-10-12B UNLESS OTHERWISE SPECIFIED.

NOTES:

39A RCP-E (BLU)
EXTERIOR
SEE DETAIL BA

FROM LEFT SIDE



FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

(X-X)

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 39A EXT RECEPTACLE DPLX 120VAC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES STANDARDS/USA
- 12D ELECTRICAL SYSTEM 30 AMP

1B1	12D	265	01 222HD
TITLE: WIRING INSTL-BODY, 110V(R30)			
SHEET 2 OF 4		FIG 1E	NO 135685

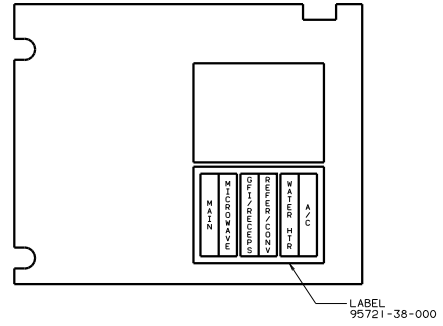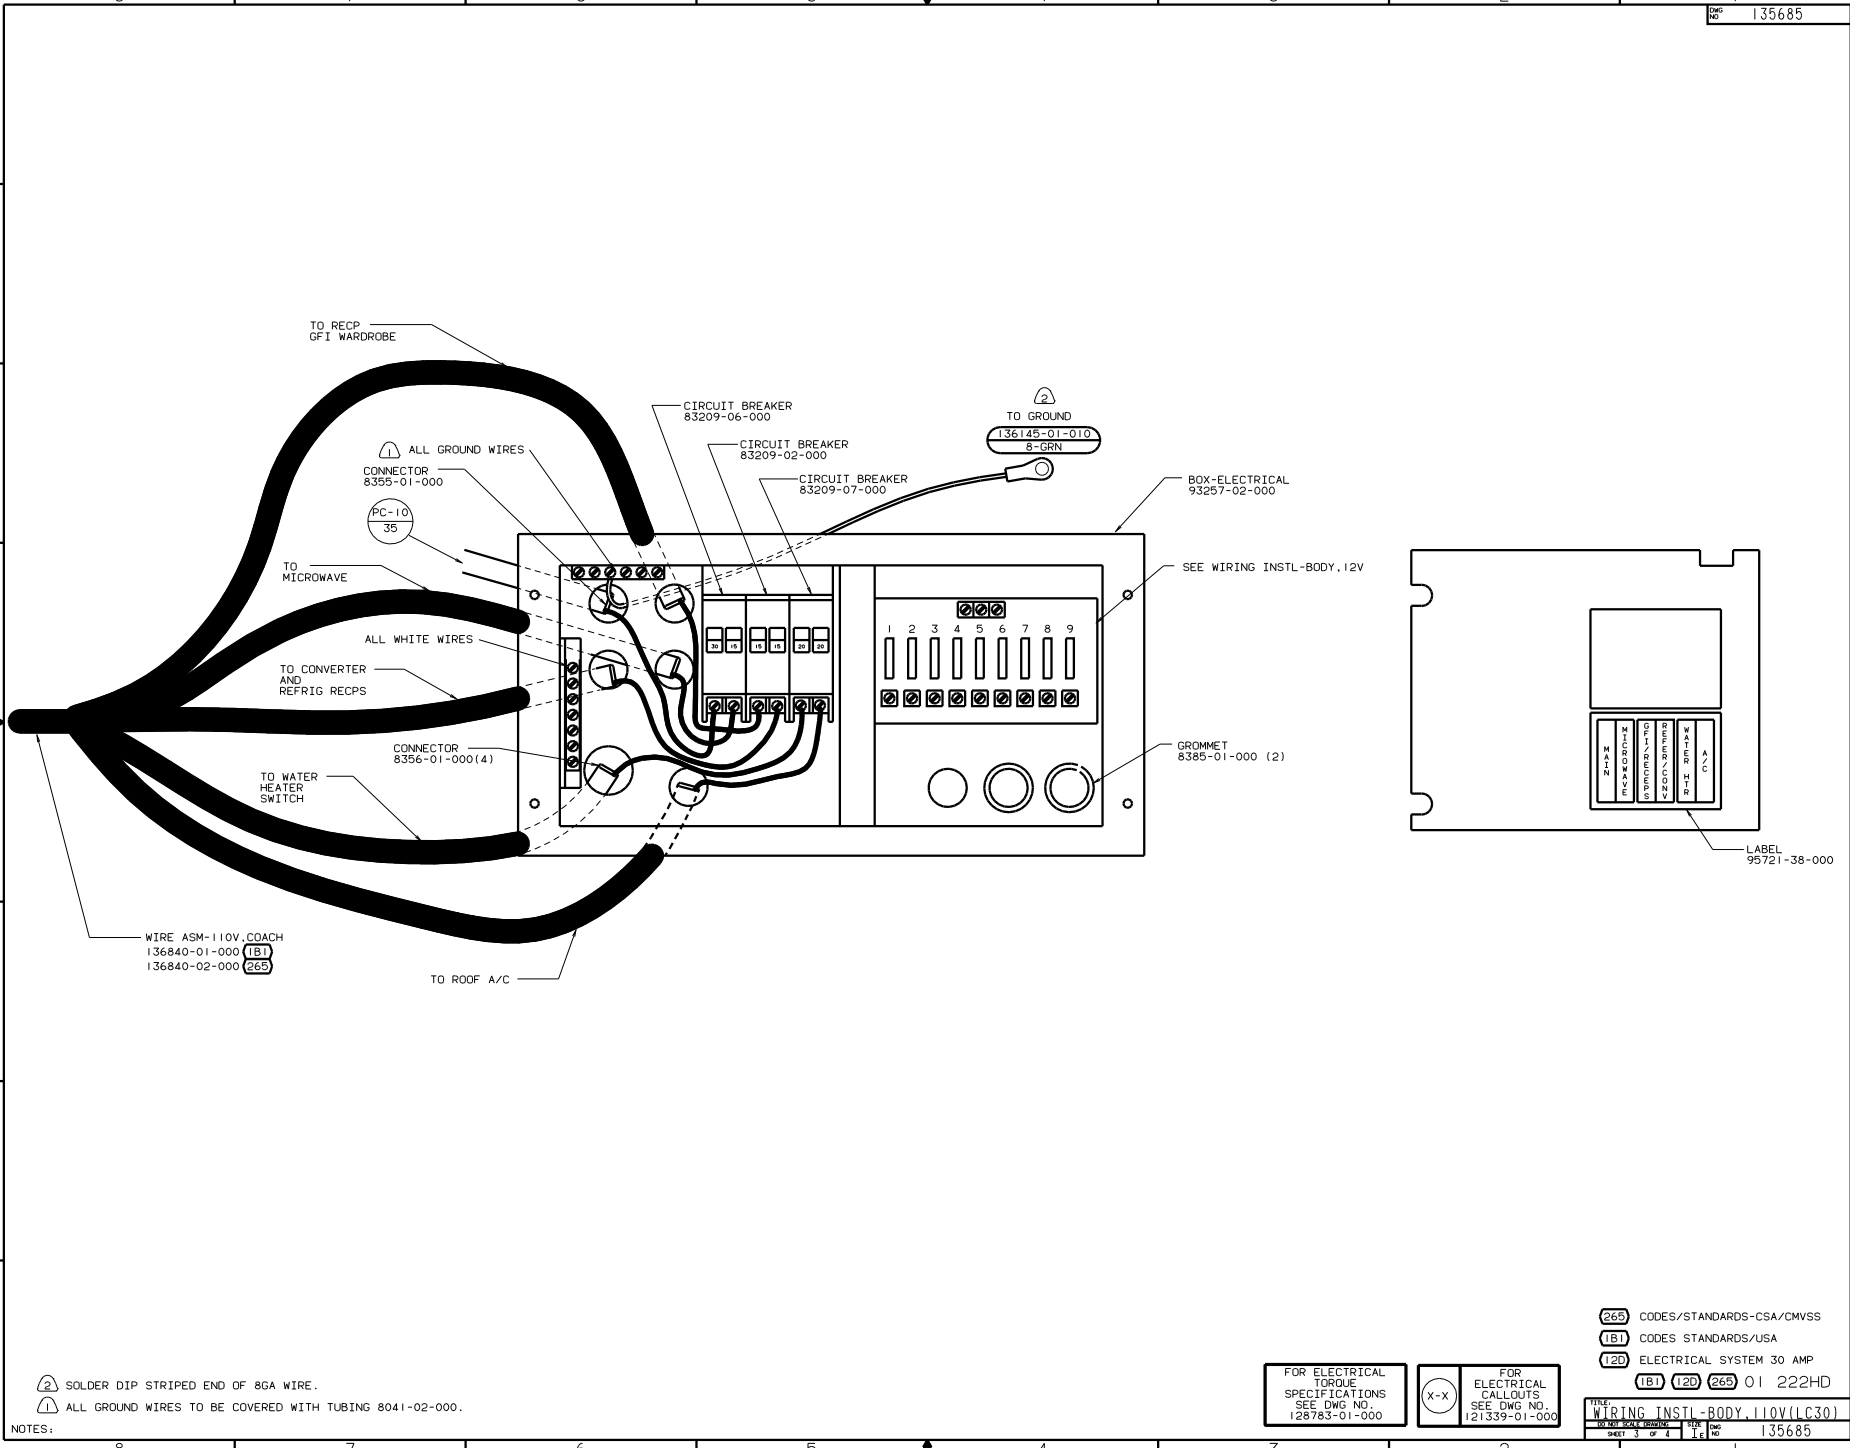


NOTES:
 (2) SOLDER DIP STRIPED END OF 8GA WIRE.
 (1) ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 126783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

(265) CODES/STANDARDS-CSA/CMVSS
 (181) CODES STANDARDS/USA
 (120) ELECTRICAL SYSTEM 30 AMP
 (181) (120) (265) 01 222HD

FILE: WIRING INSTL-BODY-110V(LC30)
 SHEET 3 OF 4

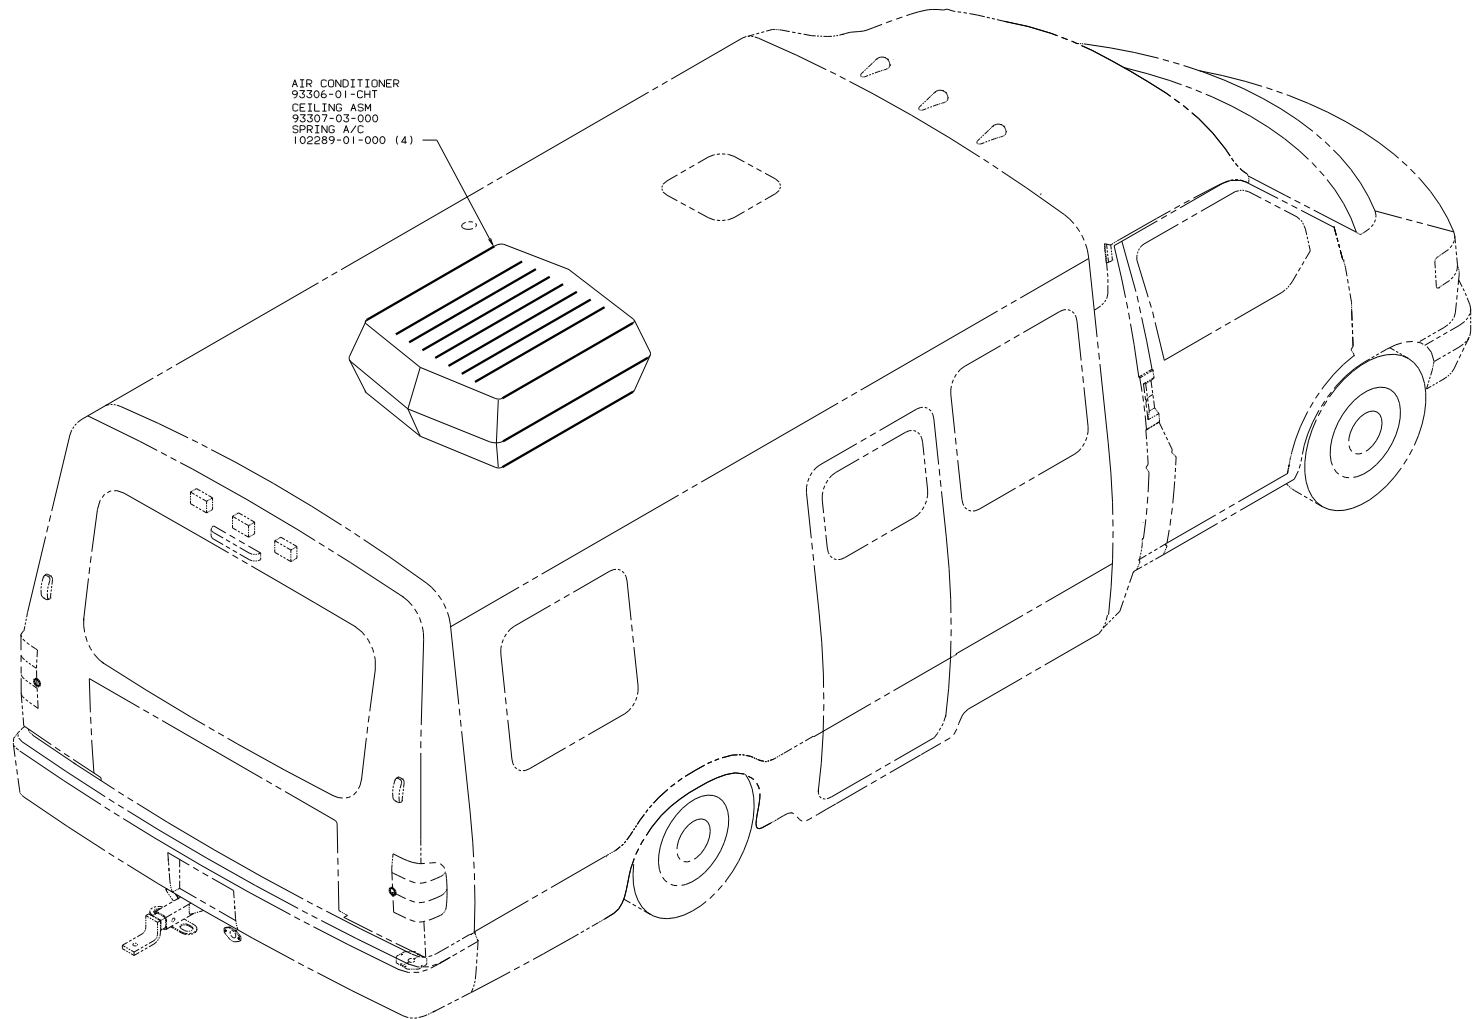

AIR CONDITIONER
 93306-01-DHT
 CEILING ASM
 93307-03-000
 SPRING A/C
 102289-01-000 (4)

- 29K** A/C ROOF-ONE 7,100 BTU
- 265** CODES/STANDARDS-CSA/CMVSS
- 1B1** CODES STANDARDS/USA
- 1B1 265 29K** 01 222HD

FOR ELECTRICAL
 TORQUE
 SPECIFICATIONS
 SEE DWG NO.
 128783-01-000

TITLE: WIRING INSTL-BODY(EX L)
 SHEET 4 of 4 I.E. NO. 135685

NOTES: